

EY75A8

Product specifications

| | |
|---|--|
| Chuck | <input type="checkbox"/> 12.7 mm Squire drive (ball-detent type) |
| Max.torque | 18V: 280 N·m 14.4V: 230 N·m |
| Speed at no load | High/Hard Mode: 0-2,500 rpm (18V), 0-2,300 rpm (14.4V) |
| | Medium Mode: 0-1,500 rpm |
| | Low/Soft Mode: 0-1,000 rpm |
| Impacts per minute | High/Hard Mode: 0-3,600 ipm (18V), 0-3,400 ipm (14.4V) |
| | Medium Mode: 0-2,900 ipm |
| | Low/Soft Mode: 0-1,900 ipm |
| Weight - including battery pack (EY9L54) | 1.8 kg |
| Size (LxHxW) - including battery pack (EY9L54) | 143 mm x 249 mm x 73 mm |



Optional accessory

1/4" hex quick
change chuck
EY9HX131E



| Work Capacity | | 18V 5.0Ah | 18V 3.0Ah | 14.4V 4.2Ah |
|---------------|--|-----------|-----------|-------------|
| | | EY9L54 | EY9L53 | EY9L45 |
| Bolting | High tensile bolt : M16 x 25mm, Metal thickness=10mm | 350 pcs | 210 pcs | - |
| | High tensile bolt : M12 x 25mm, Metal thickness=10mm | 470 pcs | 280 pcs | 320 pcs |
| | Standard tensile bolt : M16 x 25mm, Metal thickness=10mm | 1,900 pcs | 1,150 pcs | 1,000 pcs |

EY37A3

Product specifications

| | |
|--|--------------------------|
| Voltage | 18V / 14.4V |
| Suction power | 18V High: 45W Low: 12W |
| | 14.4V High: 27W Low: 12W |
| Dust collection capacity | 650 ml |
| Weight - excluding battery pack | 890 g |
| Size (LxHxW) - excluding battery pack | 452 mm x 124 mm x 160 mm |

Battery pack compatibility / Operation time with full charge

| Battery Pack | Model Number | High | Low |
|--------------|--------------|----------------|-----------------|
| 18V | 5.0Ah EY9L54 | Aprox. 30 min. | Aprox. 100 min. |
| | 4.2Ah EY9L51 | Aprox. 25 min. | Aprox. 85 min. |
| | 3.0Ah EY9L53 | Aprox. 18 min. | Aprox. 60 min. |
| | 2.0Ah EY9L52 | Aprox. 12 min. | Aprox. 40 min. |
| 14.4V | 4.2Ah EY9L45 | Aprox. 38 min. | Aprox. 67 min. |
| | 2.0Ah EY9L47 | Aprox. 18 min. | Aprox. 32 min. |

Standard accessories

| | | | |
|----------------|--------------|-------------------|--------------|
| Floor brush | WEY3782K7617 | Dust filter | WEY37A3L0247 |
| Crevice nozzle | WEY37A3K7557 | Filter grid | WEY37A3W3037 |
| Extension pipe | WEY37A3K7307 | Protection filter | WEY3780L0138 |



* Battery pack is not included in the kit.

Panasonic®

Panasonic Power Tools

'Panasonic House' Willoughby Road
Bracknell, Berkshire
RG12 8FP United Kingdom

Produced in Japan 05/2018

© 2018 Panasonic Electric Works Europe AG

www.panasonic-powertools.eu



DEALER'S STAMP

Panasonic Electric Works Europe AG

The design and specification of products are constantly changing in the interest of improvement. Whilst every care has been taken in preparation of this catalogue, some changes may not have been indicated and may have occurred after publication. Please check with your Panasonic dealer for details. Panasonic Electric Works Europe AG cannot accept responsibility for any errors and omissions.

Panasonic

Cordless Impact Wrench

EY75A8

Cordless Vacuum Cleaner

EY37A3



High power and durability in a compact body

TOUGH TOOL IP™


14.4V / 18V



EY75A8

High power: 280Nm

The newly designed hammer mechanism ensures a compact yet highly durable unit. Tightens to M16 and pre-tightens to M20. Equal torque in forward or reverse means speedy assembly and disassembly.

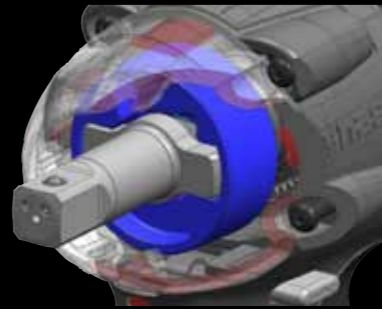

Increased housing durability

Bumper protection has been increased to reduce wear on housing surfaces, a tougher rubber helps avoid oil and solvent damage to grip areas and new metal battery contact liners for extra durability in serial use applications.

Compact body: 143mm

Easy handling when working in tight spaces or when using longer sockets.



Battery level indicator

One-push battery level indicator helps avoid work interruptions due to low battery.



LED light

Even in poorly lit areas, the 3 mode integral LED light can illuminate the working area.



EY37A3


Suction Power 45W
(with 18V 5.0Ah battery pack)
Powerful dust collection, including stubborn plaster dust




Portable 1.6 kg
(with 18V 5.0Ah battery pack)

Compact and lightweight, with a comfortable grip

Easy empty dust box



Dust box detaches from device for simple dust disposal.



Simply pull out the dust filter half way and shake to clean.



Easy-empty anti-static filter means dust simply drops away.



Then simply dispose of the contents of the dust box.



Spacious 650ml collection capacity

Clog-resistant filter maintains suction power

Comfortable grip helps you work longer



Crevice nozzle has a rubber cover to prevent damage to wooden surfaces



Powerful vacuum cleaner with 18V or 14.4V battery pack

14.4V / 18V